

CribMaster Pro-Stock⁵⁶⁰

Flexible Carousel Dispensing

ToolClarity

CribMaster Pro-Stock 560

So you want a device that takes up very little space, has the flexibility to handle multiple sized products, is easily re-configured and provides high-secure, single item dispensing? You have now found it.

Take the ease and security of carousel dispensing and add flexible carousel sizes, simple on-site re-configurability and high capacity in a very small footprint, and you have the CribMaster Pro-Stock 560. If you work in a cellular work design, why would you keep the necessary production tooling right next to the machine? Reduce hoarding, stock-outs, overstock situations and travel time to the tool crib.

The Pro-Stock 560 provides you:

An easy to use touch screen interface

Tracking with multi-category usage & accounting – Up to seven (6 user definable) classifications for tracking and reporting

Flexible automatic reordering & resupply

Item issue security – limit access to prevent incorrect usage or unauthorized access

Item issue efficiency – improved productivity by issuing nearer to job sites with fast item issue speeds

Manufacturing efficiency help – machine usage is improved by minimizing downtimes because of inventory shortage

Eliminate stock-outs with features like critical alerts and automated optimum order levels

Add inventory dispensing to your work cells for a leaner work flow

Reduce tool usage 20 - 40% or more

Automate replenishment with direct communication to your distributors

and more...



Product	Divisions per carousel	Area In. ²	Height In.	Volume In. ³	Max diagonal In.	Single division internal widths in inches at different depths in the bin		
						From center	Opening	Effective depth
Single division	56	5.3	5.2	27.7	11.05			
Double division	28	10.7	5.2	55.5	11.05	11.0	1.13	0.0
Triple division	18	16.0	5.2	83.2	11.05	10.5	1.08	0.5
Quadruple division	14	21.3	5.2	110.9	11.05	10.0	1.02	1.0
5 division	11	26.7	5.2	138.7	11.05	9.5	.97	1.5
6 division	9	32.0	5.2	166.4	11.05	9.0	.91	2.0
7 division	8	37.3	5.2	194.1	11.05	8.5	.85	2.5
8 division	7	42.7	5.2	221.9	11.05	8.0	.80	3.0
1/4 carousel	4	74.7	5.2	388.2	11.05	7.5	.84	3.5

Dimensions 30"W x 33"D x 82" T

Call today
to benefit from the

CribMaster Pro-Stock 560™
+44 (0) 208 626 44 64

Microsoft
GOLD CERTIFIED
Partner

ISV Software Solutions

CribMaster Pro-Stock⁵⁶⁰

Flexible Carousel Dispensing

ToolClarity



Cabinet Specifications

Table 1: Electrical

Parameter	Value
Input voltage	100-240V AC
Frequency	50/60 Hz
Max. Current	4.5 A
Protection Class	Class 1 (connected to protective earth ground)

Table 2: Connections



Parameter	Value
Power cord	
- for North America	3 x 16 AWG, rated 13 A @ 125 V, 3m (9ft 10in)
- for Europe	3 x 1mm ² , rated 10 A @ 250 V, 2.5m (8ft 2in)
Network connections	8-positions Ethernet connector (1 x - main cabinet only)
	6-position RS-485 connector (2x)

Table 3: Operating environment

Parameter	Value
Temperature	0°C to 35°C (32°F to 95°F)
Humidity	10% to 90% (no condensation)

Table 4: Storage environment

Parameter	Value
Temperature	-10°C to 45°C (14°F to 113°F)
Humidity	10% to 90% (no condensation)

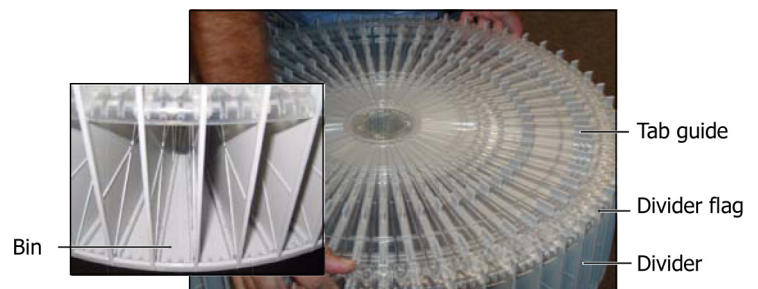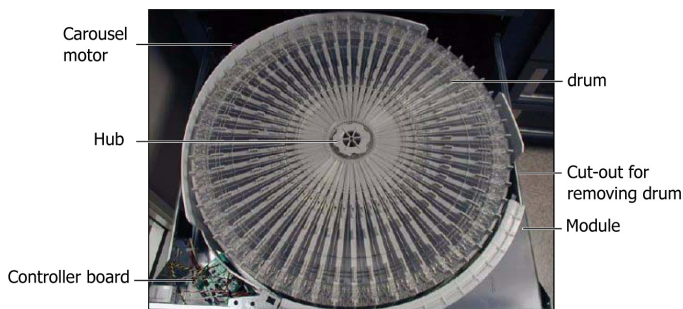

Call today
to benefit from the

CribMaster Pro-Stock 560TM
+44 (0) 208 626 44 64

Microsoft
GOLD CERTIFIED
Partner

ISV Software Solutions

CribMaster Pro-Stock

Flexible Carousel Dispensing

ToolClarity

Locker Specifications



double high lockers
replace two
carousels

single high lockers
replace one
carousel

Double High Locker Dimensions


Locker door sizes	External dimensions			Internal dimensions					Bin/tray
	Depth In.	Width In.	Height In.	Internal Depth	Top width (A)	Bottom width (B)	Usable Height (C)	Height (D)	
1/6 wide	29.25	27	15.11	28.25	2.5	3.2	12.1	9.35	DS Clear Tray 57-3000
2/6 - wide	29.25	27	15.11	28.25	6.4	7.1	12.1	9.35	Akro Mills 30124
3/6 - wide	29.25	27	15.11	28.25	10.3	11	12.1	9.35	Akro Mills 30184
4/6 - wide	29.25	27	15.11	28.25	14.2	14.9	12.1	9.35	USPlastic.com 51074
5/6 - wide	29.25	27	15.11	28.25	18.1	18.8	12.1	9.35	USPlastic.com 51031
Full door	29.25	27	15.11	28.25	22	22.7	12.1	9.35	USPlastic.com 51072

Single High Locker Dimensions


Locker door sizes	External dimensions			Internal dimensions					Bin/tray
	Depth In.	Width In.	Height In.	Internal Depth	Top width (A)	Bottom width (B)	Usable Height (C)	Height (D)	
1/6 wide	29.25	27	7.5	28.25	2.5	3.2	5.5	2.75	DS Clear Tray 57-3000
2/6 - wide	29.25	27	7.5	28.25	6.4	7.1	5.5	2.75	Akro Mills 30124
3/6 - wide	29.25	27	7.5	28.25	10.3	11	5.5	2.75	Akro Mills 30184
4/6 - wide	29.25	27	7.5	28.25	14.2	14.9	5.5	2.75	USPlastic.com 51074
5/6 - wide	29.25	27	7.5	28.25	18.1	18.8	5.5	2.75	USPlastic.com 51031
Full door	29.25	27	7.5	28.25	22	22.7	5.5	2.75	USPlastic.com 51072




1/6 wide door




2/6 wide door




3/6 wide door




4/6 wide door




5/6 wide door




Full door

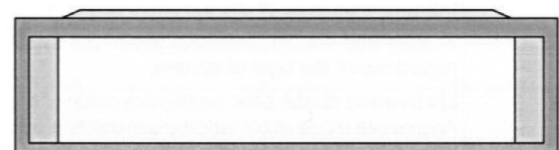


1-door

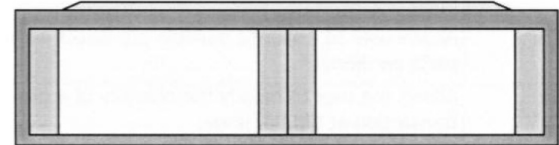

2-door

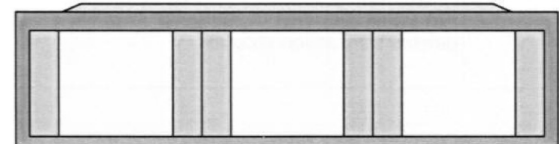

3-door

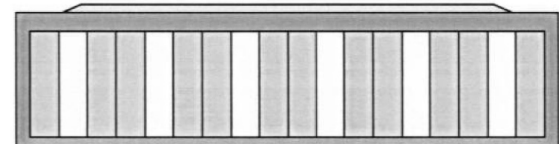

6-door